

DS-3E1326P-EI (B) **24 Port Fast Ethernet Smart PoE Switch**



Smart managed switches are developed by Hikvision, featuring easy management and maintenance. You can easily deploy, monitor and expand your surveillance system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance

- 24 × 10/100M PoE ports, 2 × Gigabit combos.
- Total PoE Power Budget 370 W
- Support 802.1Q VLAN
- Support PoE watchdog to detect and restart the cameras that do not respond
- Support STP/RSTP Loop prevention
- Support cable detection to locate failure
- Up to 300 m Long Range PoE Transmission
- 6 kV Surge Protection

▪ Specification


| General | |
|---------------------------|--|
| Shell | Metal material |
| Net Weight | 2.83 kg (6.24 lb) |
| Gross Weight | 3.8 kg (8.38 lb) |
| Dimensions (W × H × D) | 440.00 mm × 44.00 mm × 220.80 mm (17.32" × 1.73" × 8.69") |
| Operating Temperature | 0 °C to 45 °C (0 °F to 113 °F) |
| Storage Temperature | -40 °C to 85 °C (-40 °F to 185 °F) |
| Operating Humidity | 5% to 95% (no condensation) |
| Relative Humidity | 5% to 95% (no condensation) |
| Power Supply | 100-240 V AC, 50/60 Hz, Max. 6.3 A |
| Max. Power Consumption | 400 W |
| Installation Mode | Rack (equipped with mounting ears) |
| Power Consumption in Idle | 30 W |
| Surge Protection | 6 kV |
| Network Parameters | |
| Ports | 24 × 10/100 Mbps PoE port, 2 × Gigabit combo |
| MAC Address Table | 16 K |
| Switching Capacity | Whole-Device Performance: 14.8 Gbps Port Performance: 8.8 Gbps |
| Packet Forwarding Rate | Whole-Device Performance: 11.01 Mpps Port Performance: 6.55 Mpps |
| Internal Cache | 4 Mbits |
| PoE Power Supply | |
| PoE Standard | IEEE 802.3af, IEEE 802.3at |
| PoE Power Pin | 8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-) |
| PoE Port | PoE: Ports 1 to 24 |
| Max. Port Power | 30 W |
| PoE Power Budget | 370 W |
| Software Function | |
| Long Range | Ports 1 to 24: up to 300 m. Long range performance may vary depend on camera model or cable condition. |
| VIP Port | Ports 1 to 8: data on VIP ports is preferentially forwarded when bandwidth resources are insufficient. |
| Port Isolation | Ports 1 to 24: port isolation mode to improve network security Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group. |
| PoE Watchdog | Ports 1 to 24: auto detect and restart the cameras that do not respond. |
| Link Aggregation | Link aggregation is used to aggregate multiple physical ports to form a logical port for load balancing, bandwidth expansion, and port protection. Support static link aggregation. Support 1 aggregation group. |
| Loop Prevention | Loop prevention is used to prevent the switching network from forming loops, which will seriously affect network communication. Disabled by default. Support 802.1D STP. Support 802.1w RSTP. |

| | |
|--------------------|--|
| VLAN | <p>VLAN is used for network scale planning and network health improvement.</p> <p>Support 802.1Q.</p> <p>Configurable VLAN ID from 1-4094.</p> <p>Support Trunk, Access port mode.</p> <p>Support Max. 4094 VLAN.</p> |
| HPP | <p>Support one-click activation and remote management via Hik-Partner Pro. Functions supported:</p> <ol style="list-style-type: none"> 1. Display the port rate. 2. Display the port bandwidth utilization rate. 3. Display the PoE power usage. 4. Display topology information. 5. Display the alarm status. 6. Restart ports and devices. 7. Enable port long-range mode. 8. Remotely upgrade the device. |
| System Maintenance | <p>Support device management via web.</p> <p>Support DHCP Client. Enabled by default for dynamic assignment of management IP addresses.</p> <p>Support Super IP, which is a fixed IP address (10.180.190.200) for direct access.</p> <p>Support management via Hik-Central Pro.</p> <p>Support remote management via Hik-Partner Pro.</p> <p>Support cable detection. Abnormal open circuits and short circuits as well as network cable length can be detected.</p> <p>Supports 802.1ab LLDP for peer device discovery.</p> <p>Support port mirroring for fault locating.</p> |
| Approval | |
| EMC | <p>CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020), IC (ICES-003: Issue 7:2020), RCM (AS/NZS CISPR 32: 2015)</p> |
| Safety | <p>CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition)), CE-LVD (EN 62368-1: 2014+A11: 2017)</p> |
| Chemistry | <p>CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)</p> |

▪ Available Model


DS-3E1326P-EI(B)

▪ Typical Application

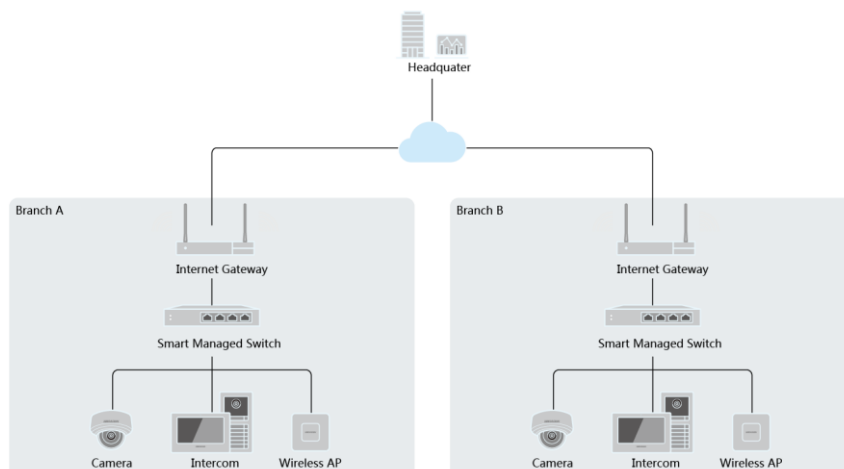

▪ Physical Interface

Front Panel

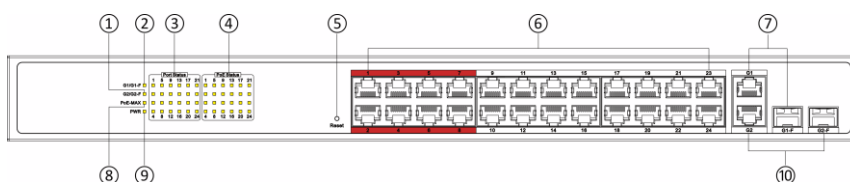

Rear Panel



| No. | Indicator/Port | Description |
|-----|------------------------------|---|
| ① | G2/G2-F Indicator | <ul style="list-style-type: none"> ● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal. |
| ② | G1/G1-F Indicator | <ul style="list-style-type: none"> ● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal. |
| ③ | Port Status Indicator | <ul style="list-style-type: none"> ● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal. |
| ④ | PoE Status Indicator | <ul style="list-style-type: none"> ● Solid on: The switch provides power supply to a powered device (PD) normally. ● Unlit: The switch is disconnected to a PD, or provides power supply to a PD abnormally. |
| ⑤ | Reset Button | Press and hold the reset button for about five seconds to restore all the configurations of the switch to default settings. |
| ⑥ | 10/100 Mbps PoE RJ45 Port | Used for connection to a PD via a network cable. |
| ⑦ | Gigabit Combo (G1/G1-F Port) | <ul style="list-style-type: none"> ● When connected to a network cable, the combo is a RJ45 port. ● When plugged into with an optical module and connected to an optical fiber, the combo functions as a fiber optical port. ● When connected to both the network cable and optical fiber at the same time, the combo works as a fiber optical port. |

| | | |
|---|------------------------------|--|
| ⑧ | PoE-MAX Indicator | <ul style="list-style-type: none"> ● Solid on/Flashing: The output power of the switch is about to reach or has reached the upper limit. The power supply may be abnormal if more devices are connected. ● Unlit: The switch does not supply power to a powered device (PD), or supplies power to a PD normally and its output power does not reach the upper limit. <p>Note: The PoE-MAX indicator will be unlit in 5 seconds after the output power of the switch returns to normal.</p> |
| ⑨ | PWR Indicator | <ul style="list-style-type: none"> ● Solid on: The switch is powered on normally. ● Unlit: No power supply connected or power supply is abnormal. |
| ⑩ | Gigabit Combo (G2/G2-F Port) | <ul style="list-style-type: none"> ● When connected to a network cable, the combo is a RJ45 port. ● When plugged into with an optical module and connected to an optical fiber, the combo functions as a fiber optical port. ● When connected to both the network cable and optical fiber at the same time, the combo works as a fiber optical port. |
| ⑪ | Grounding Terminal | Used for connection to a grounding cable to protect the switch from lightning. |
| ⑫ | Power Supply | Use the attached AC power cord to connect the switch to a socket. |

▪ Dimension

