

## **DS-3E0524TF(C)** **24 Port Gigabit Unmanaged Switch**



- Layer 2 network switch designed for video data transmission.
- 12 × Gigabit RJ45 port, 12 × Gigabit fiber optical port.
- IEEE 802.3, IEEE802.3u and IEEE802.3x network standards available.
- Store-and-forward switching.
- Delay of data-exchange less than 5 us.
- Safe and reliable using 6 kV high surge protection.
- Plug and play ensures simplicity and convenience.


## ▪ Specification

General	
Shell	Metal material, fan-free design
Net Weight	2.60 kg (5.73 lb)
Gross Weight	3.30 kg (7.28 lb)
Dimensions (W × H × D)	440.0 mm × 44.0 mm × 220.8 mm (17.3" × 1.7" × 8.7")
Operating Temperature	0 °C to 50 °C (32 °F to 122 °F)
Storage Temperature	−40 °C to 85 °C (−40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	220 V AC, 50/60 Hz
Max. Power Consumption	40 W
Power Consumption in Idle	10 W
Installation Mode	Rack (equipped with mounting ears)
Surge Protection	6 kV
Network Parameters	
Ports	12 × Gigabit RJ45 port, 12 × Gigabit fiber optical port
MAC Address Table	16 K
Switching Capacity	48 Gbps
Packet Forwarding Rate	35.7 Mpps
Internal Cache	12 Mbits
Approval	
EMC	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020)
Safety	CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition)), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2018)

## ▪ Available Model


DS-3E0524TF(B)

## ▪ Typical Application

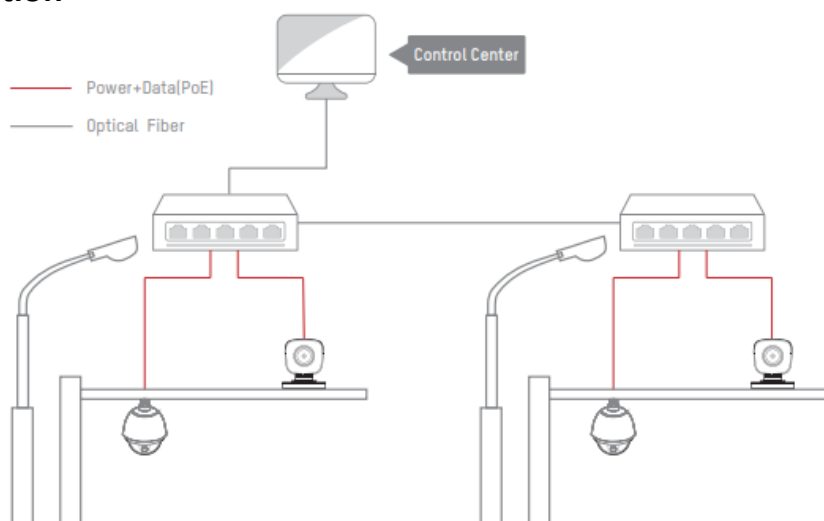

## Physical Interface

Front Panel

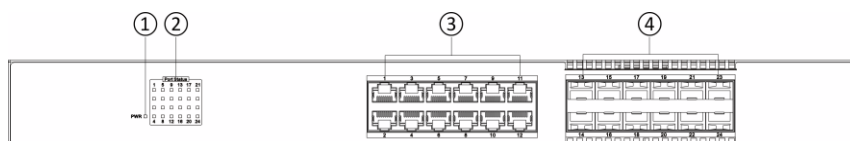


Rear Panel



No.	Indicator/Port	Description
①	PWR Indicator	<ul style="list-style-type: none"> <li>● Solid on: The switch is powered on normally.</li> <li>● Unlit: No power supply is connected or power supply is abnormal.</li> </ul>
②	Port Status Indicator	<ul style="list-style-type: none"> <li>● Solid on: The port is connected.</li> <li>● Flashing: The port is transmitting data.</li> <li>● Unlit: The port is disconnected or connection is abnormal.</li> </ul>
③	Gigabit RJ45 Port	Used for connection to another device via a network cable.
④	Gigabit SFP Fiber Optical Port	Used for connection to another device via an optical fiber when plugged into with an optical module.
⑤	Grounding Terminal	Used for connection to a grounding cable to protect the switch from lightning.
⑥	Power Supply	Use the attached AC power cord to connect the switch to a socket.

## ▪ Dimension

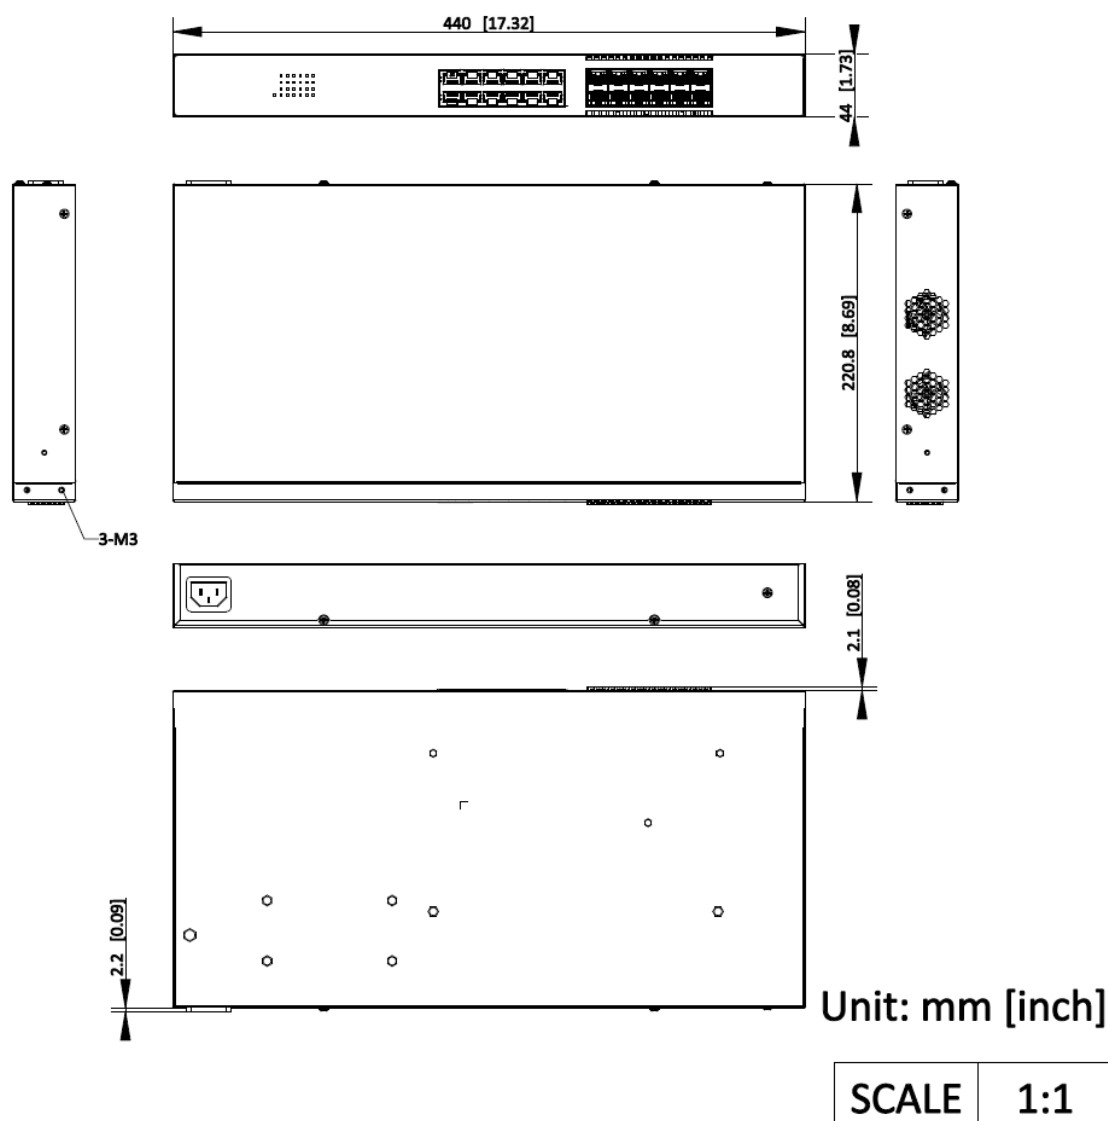

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

