

DS-A83024S-ICVS/Micro



Introduction

The DS-A83024S-ICVS/Micro is Hikvision high-end storage product. The controller architecture and no-cable design guarantee system stability. The high-end hardware design adopts two Xeon 64-bit multi-core processors for each controller, realizing 64 GB cache. The hardware platform adopts PCI-E 3.0 bus and SAS 3.0 high-speed I/O channel technology to lay a solid foundation for the system performance. One cluster system support 300 storage devices and totally capacity can be scalable up-to 300 PB. Support fully symmetric or asymmetric and fully distributed clustered architecture, the storage have fully journaled. The product makes use of ultra-fault-tolerant network RAID technology which is based on Eraser Code. It is not only provided with multi-HDD/multi-device fault-tolerant mechanism of the traditional network RAID, but also can continue data reading and writing service when the fault HDD/device number exceeds the redundant amounts. It provides data storage service with high reliability, high stability, and high performance, widely applicable to video security industry.

Available Model

DS-A83024S-ICVS/Micro

Features

Hardware Platform of New Generation

- PCI-E 3.0 bus.
- 12 Gb SAS 3.0 high-speed I/O channel.
- Redundant design for key components.

System Configuration of High Performance

- Modular and no-cable design.
- Single controller with two Xeon 64-bit multi-core processors.
- 32/64 GB cache.
- 6 Gigabit network interfaces.

Ultra-Fault-Tolerant Network RAID

- N + M: K redundant mechanism. ($N \in [1, 15]$, $M \in [1, 4]$, $K \in [1, 4]$)
- When there are K fault devices, data will not lose, and the business will not be interrupted.
- When the fault device number exceeds K, the business will not be interrupted.

Stream Data Management Structure of High Performance

- Based on the bottom layer management structure of the stream media, it can solve the problem that the damaged file system will lead to file unreadability or loss. The cyclic covering writing will not produce file fragments.

Direct Storage of Mixed Stream

- Supports mixed storage of video stream and picture stream.
- Supports camera access through RTSP, ONVIF, PSIA protocol, etc.

User-Friendly Operation and Maintenance

- Centralized operation and maintenance, realizing centralized management of multi-devices.
- Supports changing disk/device in batch.
- Supports abundant alarm management methods, including alarm via indicators, mobile phone messages, emails, etc. to raise device maintenance efficiency.




Specification

Model		DS-A83024S-ICVS/Micro
Performance	Standard cluster (2 Mbps)	600-ch
Controller	Processor	2 Xeon 64-bit multi-core processors
	Cache	32 GB
HDD	HDD slot	24
	Interface	SATA
	Capacity	4 TB/6 TB/8 TB/10 TB/12 TB/14 TB/16TB (enterprise HDD)
	Hot-swapping	Supported
	RAID	Network RAID: N + M: K, N + M ≤ 16, M ≥ K, N ∈ [1, 15], M ∈ [1, 4], K ∈ [1, 4]
Storage Management	Disk management	Disk detection pre-alarm and repair
	Cache protection	Supports customizing BBU in case of unexpected power failure to protect the cache data from being lost.
Device Maintenance and Management	Management method	GUI based on web, serial port CLI, management based on platform
	Alarm method	Audio, indicator, GUI
Interfaces	Data network interface	6, 1000M Ethernet interface (8 × GbE or 4 × 10GbE is extendable)
	Management network interface	1, 1000M Ethernet interface
	SAS extension interface	3, 12 Gbps SAS 3.0
	COM	2: 1 for RS-232, 1 for RS-485
	USB	3 (2 × USB 3.0, 1 × USB 2.0)
General	Power supply (rated)	Redundant 1 + 1, ≤ 550 W
	Consumption (with HDDs)	≤ 484 W
	Environment temperature	<ul style="list-style-type: none"> Working: +5 °C to +40 °C (+41 °F to +104 °F) Storing: -20 °C to +70 °C (-4 °F to +158 °F)
	Environment humidity	<ul style="list-style-type: none"> Working: 20% to 80%RH (non-condensing/frozen) Storing: 5% to 90%RH (non-condensing/frozen)
	Dimension (W × H × D)	484 x 174 x 760 mm (19.1 x 6.9 x 29.9 inch)
	Weight (without HDDs)	≤ 43 kg (94.8 lb)

Physical Interface

DS-A83024S-ICVS/Micro

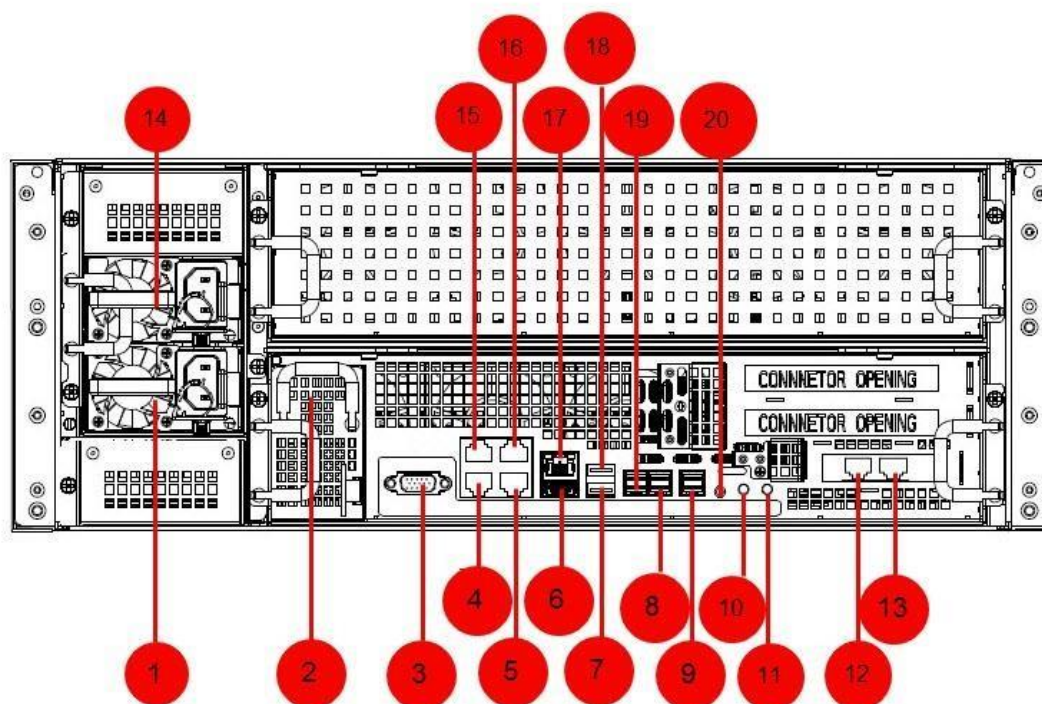

No.	Name	No.	Name
1	Power module 1	11	Power switch
2	BBU (optional)	12	LAN 5
3	RS-232 interface	13	LAN 6
4	LAN 1	14	Power module 2
5	LAN 2	15	LAN 3
6	USB interface 1	16	LAN 4
7	USB interface 2	17	Management LAN
8	SAS interface 2	18	USB interface 3
9	SAS interface 3	19	SAS interface 1
10	FN button	20	COM

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikla.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-[0]31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com