

DS-2CE16D0T-IPF 2 MP Bullet Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed lens
- Up to 20 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

▪ Specification

Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Resolution	1920 (H) × 1080 (V)
Frame Rate	TVI: 1080 p @25 fps/30 fps AHD: 1080 p@25 fps/30 fps CVI: 1080 p@25 fps/30 fps CVBS: PAL/NTSC
Min. Illumination	0.02 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s;NTSC: 1/30 s to 1/50,000 s
Lens	2.8 mm, 3.6 mm Fixed Lens
Field of View	2.8 mm, horizontal FOV: 96.9°, vertical FOV: 52.8°, diagonal FOV: 115.6° 3.6 mm, horizontal FOV: 76.9°, vertical FOV: 40.6°, diagonal FOV: 92.0°
Lens Mount	M12
Day & Night	IR Cut Filter
WDR (Wide Dynamic Range)	Digital WDR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360°
Image	
Image Mode	STD/HIGH-SAT
AGC	Yes
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	Auto
AE (Auto Exposure) Mode	DWDR,BLC,Global
Noise Reduction	2D DNR
Language	English
Function	Brightness,Mirror,Smart IR,Sharpness
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%
Consumption	Max. 3.5 W
Protection Level	IP67
Material	Plastic
IR Range	Up to 20 m
Communication	HIKVISION-C
Dimension	∅ 70 mm × 153.6 mm (∅ 2.76" × 6.05")
Weight	Approx. 145 g (0.32 lb.)

▪ Available Model

DS-2CE16D0T-IPF(2.8mm)


DS-2CE16D0T-IPF(3.6mm)

DS-2CE16D0T-IPF/ECO(3.6mm)(MENA ECO)

DS-2CE16D0T-IPF/ECO(2.8mm)(MENA ECO)

DS-2CE16D0T-IPF(2.8mm)(UZB)
DS-2CE16D0T-IPF(3.6mm)(UZB)
DS-2CE16D0T-IPF(3.6mm)(HAWK VISION)
DS-2CE16D0T-IPF(2.8mm)(HAWK VISION)
DS-2CE16D0T-IPF(2.8mm)(LA STD)/P
DS-2CE16D0T-IPF(2.8mm)(CHI)

▪ Dimension

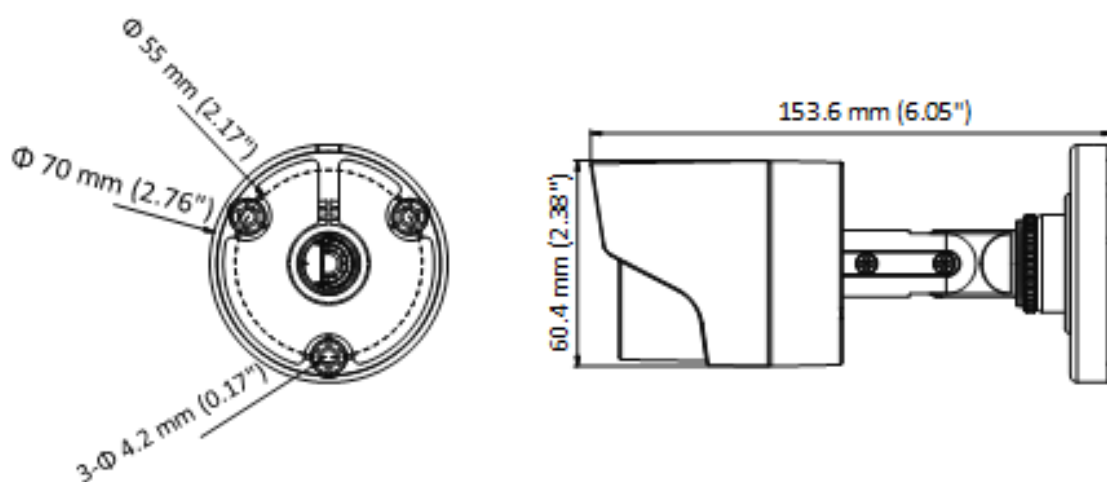

▪ Accessory

▪ Optional

DS-1280ZJ-XS
Junction Box



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

